

BIRCH, STEWART, KOLASCH & BIRCH, LLP

TERRELL C. BIRCH
RAYMOND C. STEWART
JOSEPH A. KOLASCH
JAMES M. SLATTERY
BERNARD L. SWEENEY*
MICHAEL K. MUTTER
CHARLES GORENSTEIN
GERALD M. MURPHY, JR.
LEONARD R. SVENSSON
TERRY L. CLARK
ANDREW D. MEIKLE
MARC S. WEINER
JOE MCKINNEY MUNCY
ROBERT J. KENNEY
DONALD J. DALEY
JOHN W. BAILEY
JOHN A. CASTELLANO, III
OF COUNSEL:
HERBERT M. BIRCH (1905-1996)
ELLIOT A. GOLDBERG*
WILLIAM L. GATES*
EDWARD H. VALANCE
RUPERT J. BRADY (RET.)*
ADMITTED TO A BAR OTHER THAN VA.

INTELLECTUAL PROPERTY LAW
8110 GATEHOUSE ROAD
SUITE 500 EAST
FALLS CHURCH, VA 22042-1210
USA

(703) 205-8000

FAX: (703) 205-8050
(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com
web: http://www.bskb.com

CALIFORNIA OFFICE
650 TOWN CENTER DRIVE, SUITE 1120
COSTA MESA, CA 92626-7125
(714) 708-8555
FAX: (714) 708-8565

GARY D. YACURA
THOMAS S. AUCHTERLE
MICHAEL R. CAMMARATA
JAMES T. ELLER, JR.
SCOTT L. LOWE
MARY ANN CAPRIA
MARK J. NUELLE, PH.D.
DARIN E. BARTHOLOMEW
D. RICHARD ANDERSON
PAUL C. LEWIS
W. KARL RENNER

REG. PATENT AGENTS.
FREDERICK R. HANDREN
ANDREW J. TELESZ, JR.
MARYANNE LIOTTA, PH.D.
MAKI HATSUMI
MIKE S. RYU
CRAIG A. McROBBIE
GARTH M. DAHLEN, PH.D.
LAURA C. LUTZ
ROBERT E. GOOZNER, PH.D.
HYUNG N. SOHN
MATTHEW J. LATTIG
ALAN PEDERSEN-GILES

PTO
J0525 U.S. PTO
09/45/97
11/30/99

Date: November 30, 1999

Docket No.: 0033-0630P

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): WATANABE, Shuichi

For: IMAGE RETRIEVING APPARATUS PERFORMING RETRIEVAL BASED ON
CODING INFORMATION UTILIZED FOR FEATURED FRAME EXTRACTION
OR FEATURE VALUES OF FRAMES

Enclosed are:

X A specification consisting of 37 pages

X 15 sheet(s) of formal drawings

X An assignment of the invention

X Certified copy of Priority Document(s)

X Executed Declaration X Original Photocopy

 A verified statement to establish small entity status under 37
CFR 1.9 and 37 CFR 1.27

 Preliminary Amendment

X Information Disclosure Statement, PTO-1449 and reference(s)

Other _____

The filing fee has been calculated as shown below:

LARGE ENTITY				SMALL ENTITY	
FOR	NO. FILED	NO. EXTRA	RATE	FEE	
BASIC FEE	***** ***** *****	***** ***** *****	***** ***** *****	\$760.00	or
TOTAL CLAIMS	26 - 20 =	6	x18 =\$	108.00	or
INDEPENDENT	6 - 3 =	3	x78 =\$	234.00	or
MULTIPLE DEPENDENT CLAIM PRESENTED	<u>no</u>		+260 = \$	0.00	or
TOTAL				\$1,102.00	TOTAL \$ 0.00

X A check in the amount of \$1,142.00 to cover the filing fee and recording fee (if applicable) is enclosed.

— Please charge Deposit Account No. 02-2448 in the amount of \$_____. A triplicate copy of this transmittal form is enclosed.

No fee is enclosed.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By

TERRELL C. BIRCH

Reg. No. 19,382

P. O. Box 747

Falls Church, Virginia 22040-0747

(703) 205-8000
TCB/djm

1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657 2658 2659 2660 2661 2662 2663 2664 2665 2666 2667 2668 2669 2670 2671 2672 2673 2674 2675 2676 2677 2678 2679 2680 2681 2682 2683 2684 2685 2686 2687 2688 2689 2690 2691 2692 2693 2694 2695 2696 2697 2698 2699 2700 2701 2702 2703 2704 2705 2706 2707 2708 2709 2710 2711 2712 2713 2714 2715 2716 2717 2718 2719 2720 2721 2722 2723 2724 2725 2726 2727 2728 2729 2730 2731 2732 2733 2734 2735 2736 2737 2738 2739 2740 2741 2742 2743 2744 2745 2746 2747 2748 2749 2750 2751 2752 2753 2754 2755 2756 2757 2758 2759 2760 2761 2762 2763 2764 2765 2766 2767 2768 2769 2770 2771 2772 2773 2774 2775 2776 2777 2778 2779 2780 2781 2782 2783 2784 2785 2786 2787 2788 2789 2790 2791 2792 2793 2794 2795 2796 2797 2798 2799 2800 2801 2802 2803 2804 2805 2806 2807 2808

2927

TITLE OF THE INVENTION

Image Retrieving Apparatus Performing Retrieval Based on Coding Information Utilized for Featured Frame Extraction or Feature Values of Frames

5 BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to an image retrieval information storing apparatus and an image retrieving apparatus, retrieving an image based on the image retrieval information. More specifically, the present invention relates to an image retrieval information storing apparatus and an image retrieving apparatus, using coding information utilized for featured frame extraction or feature values of respective frames, as image retrieval information.

Description of the Background Art

When a user retrieves a motion picture, it is important that the user recognizes the contents of the motion picture, that is, what is the object picked up in the motion picture. Except when the motion picture has a text title or description, in most cases it is necessary for the user to confirm the contents by playing the whole motion picture. As the number of motion pictures among which a desired one is to be retrieved increases, it becomes harder for the user to play the motion pictures one by one and to confirm the contents thereof, and the efficiency of retrieval is quite poor. The efficiency of retrieval further lowers when each motion picture is in the form of coded compressed data requiring decoding and reproduction before retrieval. In order to solve this problem, a method of retrieval may be effective in which one or a plurality of frames characteristic of the motion picture, typically representing the contents of the motion picture are extracted and displayed, so that the contents of the motion picture can be displayed in schematic manner.

The characteristic frame (hereinafter referred to as featured frame) used for motion picture retrieval includes, for example, a scene change frame. Japanese Patent Laying-Open No. 9-261648 discloses a method in which a scene change frame is extracted, based on prediction mode

information included in image data, from image data coded in accordance with interframe prediction coding. Over one frame, the number of I blocks which are coded in accordance with intraframe prediction, P blocks coded in accordance with forward interframe prediction, B blocks coded in accordance with backward interframe prediction and Bi blocks coded in accordance with bidirectional interframe prediction are counted. Frequency information of respective blocks reflects correlation among frames in the motion picture. Thus, based on the frequency information of each block, a frame immediately following a scene change (= scene change frame) is detected. Further, Japanese Patent Laying-Open No. 10-23421 discloses a method of extracting a scene change frame, based on the change in amount of each piece of coding information contained in the coded image data. A conventional image retrieval information storing apparatus in accordance with the prior art is as shown in Fig. 14.

Referring to Fig. 14, the conventional image retrieval information storing apparatus includes a coding information reading unit 1401, a frame feature value generating unit 1402 connected to coding information reading unit 1401, an index information generating unit 1403 connected to frame feature value generating unit 1402, and an index information storing unit 1404 connected to index information generating unit 1403.

Coding information reading unit 1401 reads, according to Japanese Patent Laying-Open No. 9-261648, block by block prediction mode information from coded image data, and reads, according to Japanese Patent Laying-Open No. 10-23421, respective pieces of coding information of different types. Frame feature value generating unit 1402 calculates, from the various pieces of coding information read by coding information reading unit 1401, frequency of respective prediction mode blocks according to Japanese Patent Laying-Open No. 9-261648, and calculates accumulated value of amount of respective pieces of coding information according to Japanese Patent Laying-Open No. 10-23421. Index information generating unit 1403 determines the scene change frame which is the featured frame, based on the frame by frame feature value obtained in frame feature value generating unit 1402, that is, frequency information of

respective prediction mode blocks according to Japanese Patent Laying-Open No. 9-261648, and accumulated amount of respective pieces of coding information according to Japanese Patent Laying-Open No. 10-23421.

Index information generating unit 1403 outputs positional information of the scene change frame as index information. Index information storing unit 1404 stores the index information output from the index information generating unit 1403 as image retrieval information.

Fig. 15 represents a conventional image retrieving apparatus using the image retrieval information stored in this manner. Referring to Fig. 15, the conventional image retrieving apparatus includes an image retrieval executing unit 1501 executing retrieval using the image retrieval information and the coded image data as inputs and outputting the results of retrieval.

The featured frame includes, in addition to the scene change frame, a scene change frame based on rapid/slow movement, disclosed in Japanese Patent Laying-Open No. 9-284702. According to the invention disclosed in Japanese Patent Laying-Open No. 9-284702, a motion vector for detecting a scene change frame is obtained from the original image, not from the coded information, and the scene change frame is detected based on the total sum of motion vectors in a frame.

In the above described conventional image retrieval information storing apparatus, positional information of the extracted featured frame is obtained, and the positional information only is stored as the index information. Therefore, even when a plurality of images which are the objects of retrieval have mutually different features, only a featured frame representing one same feature only can be obtained. If feature frames reflecting features of respective images are to be obtained, it is necessary for the user to again generate the image retrieval information from the coded image data. In the process of retrieval, when featured frames corresponding to various features of images which are the object of retrieval are to be taken out in an interactive manner, re-generation of the image retrieval information from the coded image data significantly lowers retrieval efficiency. Further, preparation of featured frame indexes

corresponding to every possible features for all the image data is not practical. Further, it is not possible by the prior art to meet with high efficiency a request for extracting a featured frame which has not been expected by the provider providing the image retrieval information.

5 SUMMARY OF THE INVENTION

The present invention was made to solve the above described problems, and its object is to provide an image retrieval information storing apparatus capable of immediately meeting a request for switching featured frames in the process of retrieval and capable of extracting a featured frame adaptively.

Another object of the present invention is to provide an image retrieving apparatus capable of high speed image retrieval processing.

A still further object of the present invention is to provide an image retrieving apparatus capable of high speed image retrieval processing and allowing reduction in capacity used for storing data necessary for retrieval.

A still further object of the present invention is to provide an image retrieving apparatus which can flexibly meet a user's request for extracting a featured frame.

A still further object of the present invention is to provide an image retrieving apparatus which can flexibly meet a users request for extracting a featured frame and which is capable of high speed retrieval processing.

According to an aspect of the present invention, the image retrieval information storing apparatus includes: a coding information reading unit reading prescribed coding information which will be information representing frame features among coded image data; a frame feature value generating unit connected to the coding information reading unit, generating a frame feature value which is a numerical representation of frame features, based on the coding information; and a frame feature value storing unit connected to the frame feature value generating unit, and storing the frame feature value in correspondence with each frame of the image data.

The frame feature value of each frame necessary for extracting a featured frame is stored. Therefore, in the process of retrieval, it is

possible to meet a request for switching a featured frame immediately, whereby adaptive extraction of a featured frame is possible.

According to another aspect, the image retrieval information storing apparatus includes: a coding information reading unit reading prescribed coding information which will be information representing frame features among coded image data; and a coded information storing unit connected to the coding information reading unit, and storing coding information in correspondence with each frame of the image data.

The coding information necessary for extracting a featured frame is stored. Therefore, in the process of retrieval, it is possible to meet a request for switching a featured frame immediately, whereby adaptive extraction of a featured frame is possible.

According to a still further aspect, an image retrieval information storing apparatus includes: a coding information reading unit reading prescribed coding information which will be information representing frame features among coded image data; a frame feature value generating unit connected to the coding information reading unit, and generating a frame feature value which is a numerical representation of frame features based on the coding information; and a storing unit connected to the coding information reading unit and the frame feature value generating unit, and storing the coding information and the frame feature value in correspondence with each frame of the image data.

The frame feature value frame by frame and the coding information necessary for extracting a featured frame are stored. Therefore, in the process of retrieval, it is possible to meet a request for switching a featured frame immediately, whereby adaptive extraction of a featured frame is possible.

In accordance with a further aspect of the present invention, the image retrieving apparatus includes: an index information generating unit receiving a frame feature value which is a numerical representation of frame features corresponding to each frame of the coded image data, determining a featured frame among the image data based on the frame feature value in accordance with a request for extracting a featured frame,

and generating index information which is positional information of the featured frame; and a image retrieval executing unit connected to the index information generating unit, transmitting a request for extracting a featured frame to the index information generating unit, receiving the index information from the index information generating unit, receiving image data from outside and outputting a frame specified based on the index information.

The featured frame is extracted based on the frame feature value. Therefore, high speed retrieval processing is possible, and capacity used for storing data necessary for retrieval can be reduced.

In accordance with a still further aspect, the image retrieving apparatus includes: a frame feature value generating unit receiving prescribed coding information included in coded image data, which will be information representing frame features, and generating a frame feature value which is a numerical representation of the frame features, based on coding information in accordance with a request for extracting a frame feature value; an index information generating unit connected to the frame feature value generating unit, receiving the frame feature value from the frame feature value generating unit, determining a featured frame among the image data based on the frame feature value in response to a request for extracting the featured frame, and generating index information which is positional information of the featured frame; and a image retrieval executing unit connected to the frame feature value generating unit and the index information generating unit, transmitting a request for extracting frame feature value to the frame feature value generating unit, transmitting a request for extracting a featured frame to the index information generating unit, receiving index information from the index information generating unit, receiving image data from outside, and outputting a frame specified based on the index information.

The frame feature value is generated based on the coding information. Therefore, when there is a new request for extracting a frame feature value, the method of generating the frame feature value for extracting the feature frame is changed in the process of retrieval.

Therefore, it is possible to flexibly meet the user's request for extracting the featured frame.

In accordance with a still further aspect of the present invention, the image retrieving apparatus includes: a frame feature value generating unit receiving prescribed coding information included in coded image data, which will be information representing frame features, and generating a frame feature value which is a numerical representation of frame features based on the coding information in response to a request for extracting the frame feature value; an index information generating unit connected to the frame feature value generating unit, receiving frame feature values from the frame feature value generating unit and from the outside, determining a featured frame among image data based on the frame feature values in response to a request for extracting a featured frame, and generating index information which is positional information of the featured frame; and a image retrieval executing unit connected to the frame feature value generating unit and the index information generating unit, transmitting a request for extracting frame feature value to the frame feature value generating unit, transmitting a request for extracting a featured frame to index information generating unit, receiving index information from the index information generating unit, receiving image data from the outside, and outputting a frame specified based on the index information.

A new featured frame is extracted in accordance with the request for extracting the featured frame and the request for extracting frame feature value generated in the process of executing image retrieval, and with the coding information and the frame feature value. Accordingly, flexible image retrieval is possible, and high speed retrieving process based on the frame feature value is possible.

The foregoing and other objects, features, aspects and advantages of the present invention will become more apparent from the following detailed description of the present invention when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 represents a configuration of an image retrieval information

storing apparatus in accordance with a first embodiment of the present invention.

Fig. 2 represents internal configuration of a frame feature value generating unit.

5 Fig. 3 represents reference relation of frames in prediction coding method.

Fig. 4 represents a configuration of an image retrieving apparatus in accordance with the first embodiment of the present invention.

10 Fig. 5 represents an internal configuration of an index information generating unit.

Fig. 6 represents a configuration of the image retrieval information storing apparatus in accordance with the first embodiment of the present invention.

15 Fig. 7 represents a configuration of the image retrieving apparatus in accordance with the first embodiment of the present invention.

Fig. 8 represents a configuration of the image retrieval information storing apparatus in accordance with a second embodiment of the present invention.

20 Fig. 9 represents a configuration of the image retrieving apparatus in accordance with the second embodiment of the present invention.

Fig. 10 represents a configuration of the image retrieval information storing apparatus in accordance with the second embodiment of the present invention.

25 Fig. 11 represents a configuration of the image retrieving apparatus in accordance with the second embodiment of the present invention.

Fig. 12 represents a configuration of the image retrieval information storing apparatus in accordance with a third embodiment of the present invention.

30 Fig. 13 represents a configuration of the image retrieving apparatus in accordance with a third embodiment of the present invention.

Fig. 14 represents a configuration of a conventional image retrieval information storing apparatus.

Fig. 15 represents a configuration of a conventional image retrieving

apparatus.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the following description of the embodiments of the present invention, a scene change frame and a frame in which rapid movement is locally observed are extracted as featured frames, by way of example, using motion vector information and coding prediction mode information among coding information included in the image data. The configuration of the present invention is also applicable when other coding information is used or when other featured frames are to be extracted.

First Embodiment

Referring to Fig. 1, the image retrieval information storing apparatus in accordance with the first embodiment includes a coding information reading unit 101, a frame feature value generating unit 102 connected to coding information reading unit 101, and a frame feature value storing unit 103 connected to frame feature value generating unit 102.

Coding information reading unit 101 receives coded image data as an input, and reads and outputs desired coding information included in the image data. Coding information reading unit 101 in the present embodiment extracts and outputs prediction mode information and motion vector information from the coded image data.

Frame feature value generating unit 102 processes each piece of coding information obtained from coding information reading unit 101, and generates and outputs a feature frame value for each frame as a reference for determination of a featured frame.

Frame feature value storing unit 103 stores, in a prescribed storing location, an output from frame feature value generating unit 102. Details of the frame feature value storing unit 103 will be described later.

Referring to Fig. 2, frame feature value generating unit 102 includes a prediction mode counting unit 201 connected to coding information reading unit 101, frequency information converting unit 202 connected to prediction mode counting unit 201, a valid motion vector detecting unit 203 connected to coding information reading unit 101, a motion vector statistic calculating unit 204 connected to coding information reading unit 101 and

valid motion vector detecting unit 203, and a statistic information
converting unit 205 connected to prediction mode counting unit 201 and
motion vector statistic calculating unit 204.

The prediction mode information read by coding information reading
unit 101 includes prediction coding method for each frame, and prediction
method for each coding block in the frame. Prediction mode counting unit
201 counts the number of blocks coded in accordance with respective
prediction methods, frame by frame. In a forward prediction coding frame
(P frame), the number of I blocks coded in accordance with intraframe
prediction and the number of P blocks coded in accordance with interframe
prediction are counted, respectively. In a bidirectional prediction coding
frame (frame coded by bidirectional prediction) (B frame), the number of I
blocks coded in accordance with intraframe prediction, the number of P
blocks coded in accordance with forward interframe prediction, the number
of B blocks coded in accordance with backward interframe prediction and
the number of Bi blocks coded in accordance with bidirectional interframe
prediction are counted, respectively.

Further, prediction mode counting unit 201 outputs, as block
prediction mode frequency information for each frame, the total number P_p
of P blocks for the P frame, and the total number $B_f (= P + B_i)$ of forward
interframe prediction blocks (total number of blocks coded in accordance
with forward interframe prediction) and total number $B_b (= B + B_i)$ of
backward interframe prediction blocks (total number of blocks coded in
accordance with backward interframe prediction) for the B frame.

Frequency information converting unit 202 converts these pieces of
frequency information to attribute information for each frame (in the
following, the attribute information related to each frame will be referred to
as the "frame feature value"). In the present embodiment, each frame
feature value is set such that it represents correlation between the frame of
interest and an immediately preceding frame.

Referring to Fig. 3, an example of the relation of reference among P
and B frames at the time of interframe prediction coding will be described.
A starting point of an arrow represents a frame which is an object of

coding/decoding, and the end point of the arrow represents a reference frame at the time of coding/decoding. When the reference characters Pp, Bfn, and Bbn ($n = 1, 2, 3$) allotted to respective arrows represent the
 5 aforementioned frequency information, the frame feature value for frame B2, that is, frequency information related to correlation between frames B1 and B2 should be calculated by a prescribed operation from respective block frequency information Pp, Bfn, and Bbn.

10 In the present embodiment, the value used as the frame feature value of frame B2 is the value of frequency information Bf2 when frequency information Bf2 exceeds a certain threshold value, the value of frequency information Bb1 when frequency information Bf2 does not exceed the
 15 certain threshold value but frequency information Bb1 exceeds the threshold value, and otherwise the value of frequency information Bf2 or Bb1 which is larger. The frame feature value of frame B3 is calculated in the similar manner. As to frame B1, the value of frequency information Bf1 is used as the frame feature value. As to frame P4, the value of frequency information Bb3 or Pp which is larger is used as the frame
 20 feature value. The method of calculating attribute information for each frame is not limited to this. Further, the frequency information of the coded blocks counted by the prediction mode counting unit 201 may be directly regarded as frame feature values.

25 The valid motion vector detecting unit 203 detects valid motion vector only, from the motion vector information read by coding information reading unit 101. When a camera is moving while being focused on an object, for example, the object and the background of the picked up image may have motion vectors very much different in magnitude or direction. In such a case, valid motion vector detecting unit 203 extracts only that motion vector of an area of interest, for example, the area of the object.

30 Possible method of separating the object area from the background may include a method in which an average of the motion vectors of the entire frame is calculated and the motion vectors out of the average are successively extracted, and a method in which areas are divided into two by clustering. If the contents of the motion picture come to be more

complicated as the number of the objects increases, for example, a method of valid motion vector detection in accordance with the complexity may be used. If the image is not of such a nature, the valid motion vector detection may be unnecessary.

5 Motion vector statistic calculating unit 204 calculates an average value of the magnitudes of motion vectors corresponding to P block for the P frame over the entire frame, based on the prediction mode information obtained by coding information reading unit 101. Motion vector statistic calculating unit 204 calculates an average value of magnitudes of motion
10 vectors corresponding to all the blocks (Bf) coded in accordance with the forward interframe prediction and all the blocks (Bb) coded in accordance with the backward interframe prediction, for the B frame, over the entire frame. The statistics calculated may not be limited to the average value of vector magnitudes, and different statistics including average vector may be
15 calculated. Further, the motion vector is normalized considering an interval between an object frame and a reference frame at the time of calculation.

 Statistic information converting unit 205 converts each of the above described motion vector statistics obtained by motion vector statistic
20 calculating unit 204 to a frame feature value provided for each frame. Similar to the frame feature value based on the prediction mode information, the frame feature value based on the motion vector information in the present embodiment is set such that it indicates the motion information between a frame of interest and an immediately
25 preceding frame. At this time, the coding block frequency information obtained by prediction mode calculating unit 201 is referred to in calculating the motion vector frame feature value.

 Referring to Fig. 3, statistic information converting unit 205 uses as the motion vector frame feature value to be allotted to frame B2, an average
30 of magnitudes of all motion vectors corresponding to frequency information Bf2 and frequency information Bb1, when values Bf2 and Bb1 of frequency information both exceed a certain threshold value for frame B2. Statistic information converting unit 205 uses as motion vector frame feature value,

an average of magnitudes of motion vectors corresponding to frequency information Bf2, when the value of frequency information Bf2 only exceeds the threshold value. Statistic information converting unit 205 uses as motion vector frame feature value, an average of magnitudes of motion
5 vectors corresponding to frequency information Bb1, when frequency information Bb1 only exceeds the threshold value. Otherwise, statistic information converting unit 205 uses 0 as the motion vector frame feature value. The motion vector frame feature value allotted to frame B3 is calculated in the similar manner.

10 For frame B1, statistic information converting unit 205 uses as motion vector frame feature value, an average of magnitudes of motion vector corresponding to frequency information Bf1 when the value of frequency information Bf1 exceeds a certain threshold value, and otherwise 0.

15 For frame P4, statistic information converting unit 205 uses as motion vector frame feature value to be allotted to frame P4, an average of magnitudes of all motion vectors normalized, corresponding to frequency information Bb3 and frequency information Pp, when values of frequency information Bb3 and Pp both exceed a certain threshold value. When the
20 value of frequency information Bb3 only exceeds the threshold values, statistic information converting unit 205 uses as motion vector frame feature value, an average of magnitudes of the motion vectors corresponding to frequency information Bb3. Otherwise, statistic information converting unit 205 uses 0 as the motion vector frame feature
25 value.

The method of calculating the motion vector frame feature value for each frame is not limited to the above. The motion vector statistics corresponding to respective blocks described above calculated by motion vector statistic calculating unit 204 may be regarded as motion vector
30 frame statistics frame by frame.

The frame feature value on prediction mode and the frame feature value on motion vector obtained in this manner are output from frame feature value generating unit 102 and stored in prescribed storing locations

by frame feature value storing unit 103. The storing location of the frame feature value may be a location corresponding to the coded image data of each frame and, for example, it may be stored as a header information of the coded image data of each frame. Alternatively, the frame feature value may be stored as a separate data for image retrieval, independent from the coded image data.

Referring to Fig. 4, the image retrieving apparatus in accordance with the present embodiment includes an index information generating unit 401 connected to an image retrieval executing unit 402, which will be described later, and the image retrieval executing unit 402 connected to index information generating unit 401.

Index information generating unit 401 receives as input the frame feature value stored in the image retrieval information storing apparatus described above, extracts a desired featured frame based on the frame feature value of each frame, and generates and outputs as the index information, the positional information of the featured frame.

The process executed in the image retrieval executing unit 402 will be described later.

Referring to Fig. 5, index information generating unit 401 includes a scene change frame determining unit 501, connected to image retrieval executing unit 402, a scene change frame index generating unit 502 connected to scene change frame determining unit 501, a motion featured frame determining unit 503 connected to image retrieval executing unit 402, and a motion featured frame index generating unit 504 connected to motion featured frame determining unit 503.

According to the input frame feature value on prediction mode related to coding, a scene change frame is determined by scene change frame determining unit 501. In the present embodiment, the scene change frame is determined by thresholding the frame feature value on prediction modes for coding. By changing the setting of the threshold value or by adding a process when an adjacent frame is determined to be the scene change frame, the scene change frame to be extracted varies.

In the prior art, the process of extracting a scene change frame has

been independent from the image retrieval process, and the method of determining and the like have been fixed. In the present embodiment, the threshold value for determining the scene change or the process of determination is adaptively changed in response to a request for extracting a new featured frame output from the image retrieval executing unit 402 in the process of image retrieval, as will be described later. Accordingly, the desired scene change frames are extracted successively. The scene change frame index generating unit 502 generates, as index information, positional information of the scene change frame determined by the determining unit 501.

Using the frame feature value on motion vector as an input, a featured frame related to magnitude of motion or the like is determined by motion featured frame determining unit 503. In the present embodiment, peak position determination is made based on the frame feature values on motion vectors of neighboring plurality of frames, whereby a frame in which local intensive movement is observed is determined. In addition, a frame having a magnitude larger than a threshold value may be extracted, or a frame of which motion is hardly observed and which intensity of motion is on a minimum level, may be extracted as the motion featured frame.

In the prior art, the process of extracting a motion featured frame has been independent from the image retrieval process, and the method of determination and the like have been fixed. In the present embodiment, the method of determining motion featured frame related to what motion feature is of interest is adaptively changed in the process of retrieval, in response to a request for extracting a new featured frame output from image retrieval executing unit 402 in the process of retrieval, which will be described later. Therefore, desired motion featured frames are extracted successively. The motion featured frame index generating unit 504 generates, as index information, positional information of the motion featured frame determined by the determining unit 503.

The scene change frame index information and motion featured frame index information obtained in this manner are output from index

information generating unit 401 and input to image retrieval executing unit 402.

Image retrieval executing unit 402 executes image retrieval based on the input featured frame index information and the coded image data.

5 Image retrieval executing unit 402 obtains positional information of the featured frame from the featured frame index information, and decodes the corresponding frame, using the coded image data. The user recognizes the contents of the motion picture by thumbnail display (catalogue display) or respective featured frames displayed successively, and retrieves a desired
10 image. At this time, when it is determined that the featured frame applied as index information is not suitable for an image retrieval being executed or that the information is insufficient, a request for extracting a new featured frame is issued from image retrieval executing unit 402 to index information generating unit 401. Receiving the request for
15 extracting a new featured frame issued from image retrieval executing unit 402, index information generating unit 401 changes the method of determining featured frames in featured frame determining units 501 and 503, determines a desired featured frame, and outputs the positional information of the featured frame as the index information. The output
20 index information is input to image retrieval executing unit 402, and image retrieval is newly executed.

As described with respect to the index information generating unit 401, the featured frame on motion pictures, such as the scene change frame and the featured frame on motion, may be extracted differently dependent
25 on the manner of determination, and therefore, physical significance of the frame may differ. For example, a frame in which intensive movement is observed and a frame in which movement is hardly observed are frames of completely different features.

When motion picture retrieval is executed, whether it is the best to
30 display a frame in which intensive movement is observed, or a frame with less movement, or a frame having different features on motion as the featured frame of the motion picture depends on the motion picture which is the object of retrieval. Therefore, it is possible that there is a request for

switching the featured frame adaptively in the process of retrieval. In such a situation, the image retrieval information storing apparatus described above can immediately meet the request for switching the featured frame in the process of retrieval, as the image retrieval
5 information is stored in the form of frame feature values.

Referring to Fig. 6, it is possible to provide an image retrieval information storing apparatus which includes, in addition to the configuration of the image retrieval information storing apparatus shown in Fig. 1, an index information generating unit 401 generating index
10 information of the featured frames connected to frame feature value generating unit 102, and an index information storing unit 601 storing index information, connected to index information generating unit 401. In this manner, index information of predetermined featured frames are separately stored together with the frame feature values. As the frame
15 feature values and featured frame index information are both stored, a request for switching a featured frame in the process of retrieval can be immediately met by using the frame feature value, and high speed retrieval can be executed by using fixed index information when there is no request for switching in the process of retrieval.

Referring to Fig. 7, the image retrieval apparatus corresponding to the image retrieval information storing apparatus shown in Fig. 6 includes an index information generating unit 401 connected to image retrieval
20 executing unit 402, which will be described later, and the image retrieval executing unit 402 connected to index information generating unit 401.

Index information generating unit 401 has similar structure as index
25 information generating unit 401 described with reference to Figs. 4 and 5. Therefore, detailed description thereof is not repeated here.

Image retrieval executing unit 402 executes image retrieval based on the coded image data and index information of featured frames, in the
30 similar manner as image retrieval executing unit 402 described with reference to Fig. 4. At this time, the frame index information is applied not only from the index information generating unit 401 but also from prescribed storing locations referred by index information storing unit 601

of Fig. 6.

In the present embodiment, the image retrieval information storing apparatus and the image retrieving apparatus are different apparatuses between which index information and the frame feature values are stored and passed. Such information generated by the image retrieval information storing apparatus may be directly passed to the image retrieving apparatus, and retrieval may be executed on-line.

Second embodiment

Referring to Fig. 8, the image retrieval information storing apparatus in accordance with the second embodiment includes a coding information reading unit 101, and a coding information storing unit 801 connected to coding information reading unit 101, for storing the coding information read by coding information reading unit 101 at a prescribed storing location. Coding information reading unit 101 is similar to that described in the first embodiment. Therefore, detailed description thereof is not repeated.

The image retrieval information storing apparatus in accordance with the first embodiment above is to store the frame feature value of each frame. In the image retrieval information storing apparatus in accordance with the present embodiment, coding information which is the base for extracting the featured frame read by coding information reading unit 101 is stored in the prescribed storing location by the coding information storing unit 801. By this configuration, what is necessary is simply to read the coding information at the prescribed location, when the featured frame is to be extracted in image retrieval. This improves efficiency as compared with successive reading of the original coded image data. The location for storing coding information may be a position corresponding to the coded image data. For example, it may be stored as header information of the coded image data. Alternatively, the coding information may be stored independent from coded image data, as different data for image retrieval.

Referring to Fig. 9, the image retrieving apparatus in accordance

with the second embodiment includes a frame feature value generating unit 901 connected to image retrieval executing unit 902, which will be described later, and index information generating unit 401 connected to frame feature value generating unit 901 and image retrieval executing unit 902, and the image retrieval executing unit 902 connected to index information generating unit 401.

Frame feature value generating unit 901 receives coding information stored in image retrieval information storing apparatus, and generates and outputs the frame feature value in response to a request for extracting a frame feature value output from image retrieval executing unit 902. Similar to image retrieval executing unit 402 of the first embodiment, image retrieval executing unit 902 obtains positional information of featured frame from index information of the featured frames, and decodes the corresponding frame, using coded image data. At this time, image retrieval executing unit 902 issues a request for extracting a featured frame and a request for extracting frame feature value to index information generating unit 401 and the frame feature value generating unit 901, respectively. Index information generating unit 401 is similar to that described in the first embodiment, and therefore detailed description thereof is not repeated here.

In the present embodiment, an image retrieval information storing apparatus is implemented in a simple configuration in which only the coding information necessary for extracting a featured frame is extracted and stored from the original coded image data. Thus, image retrieval information storing apparatus stores the coding information. Therefore, it is possible for the user to change the method of determining a featured frame based on the frame feature value, and in addition, to change the very method of calculating the frame feature value for extracting the featured frame in the process of retrieval. Thus, more flexible image retrieval is possible.

As in the first embodiment, referring to Fig. 10, it is possible to provide an image retrieval information storing apparatus by adding, to the image retrieval information storing apparatus shown in Fig. 8, a frame

feature value generating unit 102 connected to coding information reading unit 101 and generating a frame feature value for each frame, an index information generating unit 401 connected to frame feature value generating unit 102 and generating index information of featured frame, and an index information storing unit 601 connected to index information generating unit 401 and storing index information. In this manner, index information of a predetermined featured frame is stored separately, together with coding information necessary for extracting featured frame.

When coding information and featured frame index information are both stored, a request for switching featured frame in the process of retrieval can be met by obtaining the frame feature value based on the stored coding information, and in a retrieval without a request for switching, retrieval at high speed utilizing fixed index information can be performed.

Referring to Fig. 11, the image retrieving apparatus corresponding to the image retrieval information storing apparatus shown in Fig. 10 includes a frame feature value generating unit 901 connected to image retrieval executing unit 902, which will be described later, an index information generating unit 401 connected to frame feature value generating unit 901 and image retrieval executing unit 902, and the image retrieval executing unit 902 connected to index information generating unit 401.

Frame feature value generating unit 901 and index information generating unit 401 are similar to those described with reference to Fig. 9. Therefore, detailed description thereof is not repeated here. Image retrieval executing unit 902 executes image retrieval based on the coding image data and index information of the featured frame, as image retrieval executing unit 902 described with reference to Fig. 9. At this time, the frame index information is applied not only from the index information generating unit 401 but also from a prescribed storing location referred by index information storing unit 601 of Fig. 10.

In the image retrieval information storing apparatuses of the first and second embodiments, the frame feature value for each frame and

coding information necessary for extracting the featured frame are stored. These are not incompatible, and therefore the frame feature value and the coding information necessary for extracting the featured frame may be stored together. Further, the index information, the frame feature value and the coding information necessary for extracting the featured frame may be all stored and utilized at the time of image retrieval.

Third Embodiment

Referring to Fig. 12, the image retrieval information storing apparatus in accordance with the third embodiment includes a coding information reading unit 101, a frame feature value generating unit 102 connected to coding information reading unit 101, an index information generating unit 401 connected to frame feature value generating unit 102, a storing information selecting unit 1201 connected to coding information reading unit 101, frame feature value generating unit 102 and index information generating unit 401, an index information storing unit 601, a frame feature value storing unit 103 and a coding information storing unit 801, each connected to storing information selecting unit 1201.

Coding information reading unit 101, frame feature value generating unit 102 and index information generating unit 401 are similar to those of the first embodiment. Therefore, detailed description thereof is not repeated here. Storing information selecting unit 1201 selects and outputs one, two or all of index information, frame feature value and the coding information necessary for extracting the featured frame, dependent on the situation. Index information storing unit 601, frame feature value storing unit 103 and coding information storing unit 801 store the index information, the frame feature value and coding information selected by storing information selecting unit 1201 at prescribed storing locations, respectively.

In the first embodiment, it has been described that the featured frame for a motion picture such as a scene change frame and a featured frame related to motion may be extracted differently dependent on the manner of determination, and that physical meaning of the frame may

differ. For example, a frame in which rapid movement is observed and a frame in which movement is very small are frames having different features. When motion picture retrieval is executed, whether it is appropriate to display a frame with rapid movement, or a frame with less movement, or different frame having different feature related to motion as the featured frame for the motion picture depends on the motion picture which is the object of retrieval. Therefore, there may be a request for switching the condition of extracting the featured frame adaptively in the process of retrieval.

In such a situation, the request for switching in the process of retrieval may be immediately met when the image retrieval information is stored in the form of frame feature value or in the form of coding information, by the storing information selecting unit 1201.

When there is some knowledge of the motion picture which is the object of retrieval in advance and appropriate featured frame has been known, it is possible by storing the image retrieval information in the form of index information of the featured frame by storing information selecting unit 1201, to reduce the amount of information for image retrieval, and to execute retrieval at high speed. Further, when the frame feature value or the coding information, and the index information of the featured frame are to be stored together by the storing information selecting unit 1201, it is possible to meet the request for switching in the process of retrieval immediately, and to execute retrieval at high speed.

Referring to Fig. 13, the image retrieving apparatus in accordance with the third embodiment includes a frame feature value generating unit 901 connected to image retrieval executing unit 902, which will be described later, an index information generating unit 401 connected to frame feature value generating unit 901 and image retrieval executing unit 902, and the image retrieval executing unit 902 connected to index information generating unit 401.

Frame feature value generating unit 901 receives, as an input, coding information stored in image retrieval information storing apparatus. Index information generating unit 401 receives, as an input, frame feature

value generated by frame feature value generating unit 901 and the frame feature value stored in the image retrieval information storing apparatus. Image retrieval executing unit 902 receives as inputs the index information stored in image retrieval information storing apparatus and the index
 5 information generated by index information generating unit 401. Index information generating unit 401 is similar to that described in the first embodiment. Therefore, detailed description thereof is not repeated here. Frame feature value generating unit 901 and image retrieval executing unit 902 are similar to those described in the second embodiment.

10 Therefore, detailed description thereof is not repeated here.

When there is index information, it is possible for the image retrieving apparatus to obtain the position of the featured frame based on the index information, decode the featured frame based on the input coded image data, display the same and to execute the image retrieval. When a
 15 new featured frame is required in the process of image retrieval and there is the frame feature value, the image retrieving apparatus extracts the new featured frame based on the frame feature value, and generates the index information to be used for image retrieval.

When it is determined that the frame feature value is inappropriate and there is coding information, the image retrieving apparatus generates a new frame feature value based on the coding information, extracts the new featured frame from thus generated new frame feature value, and generates index information to be used for image retrieval.

25 The advantage of storing both the frame feature value and the coding information is that image retrieval with such a high degree of freedom is possible.

When there is coding information and not the input frame feature value, the request for extracting a new featured frame is directly issued to the frame feature value generating unit 901.

30 In this manner, in the image retrieval information storing apparatus in accordance with the third embodiment, the information to be stored is selected by the storing information selecting unit 1201 dependent on the nature of the image which is the object of retrieval. Therefore, appropriate

image retrieval information is stored, and adaptive image retrieval can be executed by the image retrieving apparatus. Further it is possible to select the stored information by storing information selecting unit 1201 dependent on the rate of execution of retrieval or on the restriction of storing capacity.

As to the capacity of image retrieval information, the index information, the frame feature value and coding information have capacities larger in this order. For example, when the storage capacity of the storing location for image retrieval information is small, only the index information having small capacity is stored. When the storing capacity is sufficiently large and the rate of executing retrieval is slow, all the information is stored to ensure degree of freedom of retrieval, and index information is fully made use of so as not to lower the execution rate.

Further, it is possible to limit the image retrieval information to be stored to only two of the index information, frame feature value and the coding information necessary for extracting featured frame, and to select the stored information by storing information selecting unit 1201.

Although the present invention has been described and illustrated in detail, it is clearly understood that the same is by way of illustration and example only and is not to be taken by way of limitation, the spirit and scope of the present invention being limited only by the terms of the appended claims.

WHAT IS CLAIMED IS:

1. An image retrieval information storing apparatus, comprising:
a coding information reading unit reading prescribed coding
information which will be information representing frame feature from
coded image data;

5 a frame feature value generating unit connected to said coding
information reading unit, and generating a frame feature value which is a
numerical representation of the frame feature, based on said coding
information; and

10 a frame feature value storing unit connected to said frame feature
value generating unit, and storing said frame feature value in
correspondence with each frame of said image data.

2. The image retrieval information storing apparatus according to
claim 1, further comprising:

5 an index information generating unit connected to said frame feature
value generating unit, determining a featured frame among said image
data based on said frame feature value, and generating index information
which is positional information of said featured frame; and

an index information storing unit connected to said index
information generating unit and storing said index information.

3. The image retrieval information storing apparatus according to
claim 2, wherein

said coding information includes prediction mode information and
motion vector information; and

5 said frame feature value generating unit includes
a prediction mode counting unit connected to said coding information
reading unit, receiving said prediction mode information and counting
number of blocks coded in accordance with respective prediction methods
for each frame,

10 a frequency information converting unit connected to said prediction

mode counting unit and outputting prediction mode frame feature value which is a numerical representation of frame feature, based on the number of blocks for each prediction method,

15 a motion vector statistic calculating unit connected to said coding information reading unit, and calculating statistics of said motion vector based on said prediction mode information, and

20 a statistic information converting unit connected to said prediction mode counting unit and said motion vector statistic calculating unit, and outputting a motion vector frame feature value which is a numerical representation of frame feature, base on outputs of said prediction mode counting unit and said motion vector statistic calculating unit.

4. The image retrieving information storing apparatus according to claim 1, wherein said coding information includes prediction mode information and motion vector information; and

5 said frame feature value generating unit includes a prediction mode counting unit connected to said coding information reading unit, receiving said prediction mode information and counting number of blocks coded in accordance with respective prediction methods for each frame,

10 a frequency information converting unit connected to said prediction mode counting unit and outputting a prediction mode frame feature value which is a numerical representation of frame feature, based on the number of blocks for each prediction method,

15 a motion vector statistic calculating unit connected to said coding information reading unit, and calculating said motion vector statistics based on said prediction mode information, and

20 a statistic information converting unit connected to said prediction mode counting unit and said motion vector statistic calculating unit, and outputting a motion vector frame feature value which is a numerical representation of frame feature, based on outputs of said prediction mode counting unit and said motion vector statistic calculating unit.

5. An image retrieval information storing apparatus, comprising:
a coding information reading unit reading prescribed coding
information which will be information representing frame feature from
coded image data; and

5 a coding information storing unit connected to said coding
information reading unit and storing said coding information in
correspondence with each frame of said image data.

6. The image retrieval information storing apparatus according to
claim 5, further comprising:

5 a frame feature value generating unit connected to said coding
information reading unit, and generating a frame feature value which is a
numerical representation of frame feature based on said coding
information;

10 an index information generating unit connected to said frame feature
value generating unit, determining a featured frame among said image
data based on said frame feature value, and generating index information
which is positional information of said featured frame; and

an index information storing unit connected to said index
information generating unit and storing said index information.

7. The image retrieval information storing apparatus according to
claim 6, wherein

said coding information includes prediction mode information and
motion vector information; and

5 said frame feature value generating unit includes

a prediction mode counting unit connected to said coding information
reading unit, receiving said prediction mode information and counting
number of blocks coded in accordance with respective prediction methods
for each frame,

10 a frequency information converting unit connected to said prediction
mode counting unit and outputting a prediction mode frame feature value
which is a numerical representation of frame feature based on the number

of blocks for each prediction method,

15 a motion vector statistic calculating unit connected to said coding information reading unit and calculating statistics of said motion vector based on said prediction mode information, and

20 a statistic information converting unit connected to said prediction mode counting unit and said motion vector statistic calculating unit, and outputting a motion vector frame feature value which is a numerical representation of frame feature based on outputs of said prediction mode counting unit and said motion vector statistic calculating unit.

8. An image retrieval information storing apparatus, comprising:
a coding information reading unit reading prescribed coding information which will be information representing frame feature from coded image data;

5 a frame feature value generating unit connected to said coding information reading unit and generating a frame feature value which is a numerical representation of frame feature based on said coding information;

10 a first storing unit connected to said coding information reading unit and to said frame feature value generating unit, and storing said coding information and said frame feature value in correspondence with each frame of said image data.

9. The image retrieval information storing apparatus according to claim 8, further comprising:

5 an index information generating unit connected to said frame feature value generating unit, determining a featured frame among said image data based on frame feature value and generating index information which is positional information of said featured frame;

wherein

10 said first storing unit includes a second storing unit connected to said coding information reading unit, said frame feature value generating unit and said index information generating unit, and storing said coding

information and said frame feature value in correspondence with each frame of said image data and said index information.

10. The image retrieval information storing apparatus according to claim 9, wherein

said second storing unit includes

5 a storing information selecting unit connected to said coding information reading unit, said frame feature value generating unit and said index information generating unit, and selecting and outputting any of said coding information, said frame feature value and said index information,

10 an index information storing unit connected to said storing information selecting unit and storing said index information,

a frame feature value storing unit connected to said storing information selecting unit and storing said frame feature value in correspondence with each frame of said image data, and

15 a coding information storing unit connected to said storing information selecting unit and storing said coding information in correspondence with each frame of said image data.

11. The image retrieval information storing apparatus according to claim 8, wherein

said first storing unit includes

5 a storing information selecting unit connected to said coding information reading unit and said frame feature value generating unit, and selecting and outputting any of said coding information and said frame feature value,

10 a frame feature value storing unit connected said storing information selecting unit and storing said frame feature value in correspondence with each frame of said image data, and

a coding information storing unit connected said storing information selecting unit and storing said coding information in correspondence with each frame of said image data.

12. The image retrieval information storing apparatus according to claim 10, wherein

said coding information includes prediction mode information and motion vector information; and

said frame feature value generating unit includes

a prediction mode counting unit connected to said coding information reading unit, receiving said prediction mode information and counting number of blocks coded in accordance with respective prediction methods for each frame,

a frequency information converting unit connected to said prediction mode counting unit and outputting a prediction mode frame feature value which is a numerical representation of frame feature based on the number of the blocks for each prediction method,

a motion vector statistic calculating unit connected to said coding information reading unit, and calculating statistics of said motion vector based on prediction mode information, and

a statistic information converting unit connected to said prediction mode counting unit and said motion vector statistic calculating unit, and outputting a motion vector frame feature value which is a numerical representation of frame feature, based on outputs of said prediction mode counting unit and said motion vector statistic calculating unit.

13. The image retrieval information storing apparatus according to frame 9. wherein

said coding information includes prediction mode information and motion vector information; and

said frame feature value generating unit includes

a prediction mode counting unit connected to said coding information reading unit, receiving said prediction mode information and counting number of blocks coded in accordance with respective prediction methods for each frame,

a frequency information converting unit connected to said prediction

mode counting unit and outputting a prediction mode frame feature value which is a numerical representation of frame feature based on the number of the blocks for each prediction method,

15 a motion vector statistic calculating unit connected to said coding information reading unit, and calculating statistics of said motion vector based on prediction mode information, and

20 a statistic information converting unit connected to said prediction mode counting unit and said motion vector statistic calculating unit, and outputting a motion vector frame feature value which is a numerical representation of frame feature, based on outputs of said prediction mode counting unit and said motion vector statistic calculating unit.

14. The image retrieval information storing apparatus according to claim 8, wherein

said coding information includes prediction mode information and motion vector information; and

5 said frame feature value generating unit includes

a prediction mode counting unit connected to said coding information reading unit, receiving said prediction mode information and counting number of blocks coded in accordance with respective prediction methods for each frame,

10 a frequency information converting unit connected to said prediction mode counting unit and outputting a prediction mode frame feature value which is a numerical representation of frame feature based on the number of the blocks for each prediction method,

15 a motion vector statistic calculating unit connected to said coding information reading unit, and calculating statistics of said motion vector based on prediction mode information, and

20 a statistic information converting unit connected to said prediction mode counting unit and said motion vector statistic calculating unit, and outputting a motion vector frame feature value which is a numerical representation of frame feature, based on outputs of said prediction mode counting unit and said motion vector statistic calculating unit.

15. An image retrieving apparatus, comprising:

an index information generating unit receiving a frame feature value which is a numerical representation of frame feature corresponding to each frame of coded image data, determining a featured frame among said image data based on said frame feature value in accordance with a request for extracting a featured frame, and generating index information which is positional information of said featured frame; and

a first image retrieval executing unit connected to said index information generating unit, transmitting said request for extracting a featured frame to said index information generating unit, receiving said index information from said index information generating unit, receiving said image data from outside, and outputting a frame specified based on said index information.

16. The image retrieving apparatus to claim 15, wherein

said first image retrieval executing unit includes a second image retrieval executing unit connected to said index information generating unit, transmitting said request for extracting a featured frame to said index information generating unit, receiving said index information from said index information generating unit, receiving said image data and index information from outside, and outputting a frame specified based on said index information received from said index information generating unit and from outside.

17. The image retrieving apparatus according to claim 16, wherein said index information generating unit includes

a frame determining unit receiving said frame feature value and said request for extracting a featured frame, comparing said frame feature value and a threshold value in accordance with said request for extracting a featured frame, and determining said featured frame, and

an index generating unit connected to said frame determining unit and generating index information which is positional information of said featured frame.

18. The image retrieving apparatus according to claim 15, wherein said index information generating unit includes

a frame determining unit receiving said frame feature value and said request for extracting a featured frame, comparing said frame feature value and a threshold value in accordance with said request for extracting a
5 featured frame, and determining said featured frame, and

an index generating unit connected to said frame determining unit and generating index information which is positional information of said featured frame.

19. An image retrieving apparatus, comprising:

a frame feature value generating unit receiving prescribed coding information included in coded image data which will be information representing frame feature, and generating a frame feature value which is
5 a numerical representation of the frame feature based on said coding information, in accordance with a request for extracting the frame feature value;

an index information generating unit connected to said frame feature value generating unit, receiving said frame feature value from said frame
10 feature value generating unit, determining a featured frame among said image data based on said frame feature value in accordance with a request for extracting a featured frame, and generating index information which is positional information of said featured frame, and

a first image retrieval executing unit connected to said frame feature value generating unit and said index information generating unit,
15 transmitting said request for extracting a frame feature value to said frame feature value generating unit, transmitting said request for extracting a featured frame to said index information generating unit, receiving said index information from said index information generating unit, receiving
20 said image data from outside, and outputting a frame specified based on said index information.

20. The image retrieving apparatus according to claim 19, wherein

5 said first image retrieval executing unit includes a second image
retrieval executing unit connected to said frame feature value generating
unit and said index information generating unit, transmitting said request
for extracting a frame feature value to said frame feature value generating
10 unit, transmitting said request for extracting a featured frame to said index
information generating unit, receiving said index information from said
index information generating unit and from outside, receiving said image
data from outside, and outputting a frame specified based on said index
information.

21. The image retrieving apparatus according to claim 20, wherein
said index information generating unit includes
a frame determining unit receiving said frame feature value and said
request for extracting a featured frame, comparing said frame feature value
5 and a threshold value in accordance with said request for extracting a
featured frame, and determining said featured frame, and
an index generating unit connected to said frame determining unit
and generating index information which is positional information of said
featured frame.

22. The image retrieving apparatus according to claim 19, wherein
said index information generating unit includes
a frame determining unit receiving said frame feature value and said
request for extracting a featured frame, comparing said frame feature value
5 and a threshold value in accordance with said request for extracting a
featured frame, and determining said featured frame, and
an index generating unit connected to said frame determining unit
and generating index information which is positional information of said
featured frame.

23. An image retrieving apparatus, comprising:
a frame feature value generating unit receiving prescribed coding
information included in coded image data, which will be information

representing frame feature, and generating a frame feature value which is a numerical representation of the frame feature based on said coding
5 information, in accordance with a request for extracting a frame feature value;

an index information generating unit connected to said frame feature value generating unit, receiving said frame feature value from said frame feature value generating unit and from outside, determining a featured
10 frame among said image data based on said frame feature value in accordance with a request for extracting a featured frame, and generating index information which is positional information of said featured frame; and

a first image retrieval executing unit connected to said frame feature value generating unit and said index information generating unit,
15 transmitting said request for extracting a frame feature value to said frame feature value generating unit, transmitting said request for extracting a featured frame to said index information generating unit, receiving said index information from said index information generating unit, receiving
20 said image data from outside, and outputting a frame specified by said index information.

24. The image retrieving apparatus according to claim 23, wherein said first image retrieval executing unit includes a second image retrieval executing unit connected to said frame feature value generating unit and said index information generating unit, transmitting said request
5 for extracting a frame feature value to said frame feature value generating unit, transmitting said request for extracting a featured frame to said index information generating unit, receiving said index information from said index information generating unit and from outside, receiving said image data from outside, and outputting a frame specified based on said index
10 information.

25. The image retrieving apparatus according to claim 24, wherein said index information generating unit includes

a frame determining unit receiving said frame feature value and said request for extracting a featured frame, comparing said frame feature value and a threshold value in accordance with said request for extracting a featured frame, and determining said featured frame, and

5 an index generating unit connected to said frame determining unit and generating index information which is positional information of said featured frame.

26. The image retrieving apparatus according to claim 23, wherein said index information generating unit includes

a frame determining unit receiving said frame feature value and said request for extracting a featured frame, comparing said frame feature value and a threshold value in accordance with said request for extracting a featured frame, and determining said featured frame, and

5 an index generating unit connected to said frame determining unit and generating index information which is positional information of said featured frame.

ABSTRACT OF THE DISCLOSURE

An image retrieval information storing apparatus capable of extracting a featured frame adaptively in the process of retrieval includes a coding information reading unit reading prescribed coding information
5 which will be information representing frame feature among coded image data, a frame feature value generating unit connected to the coding information reading unit and generating a frame feature value which is a numerical representation of the frame feature based on the coding information, and a frame feature value storing unit connected to the frame
10 feature value generating unit and storing the frame feature value in correspondence with each frame of the image data.

FIG. 1

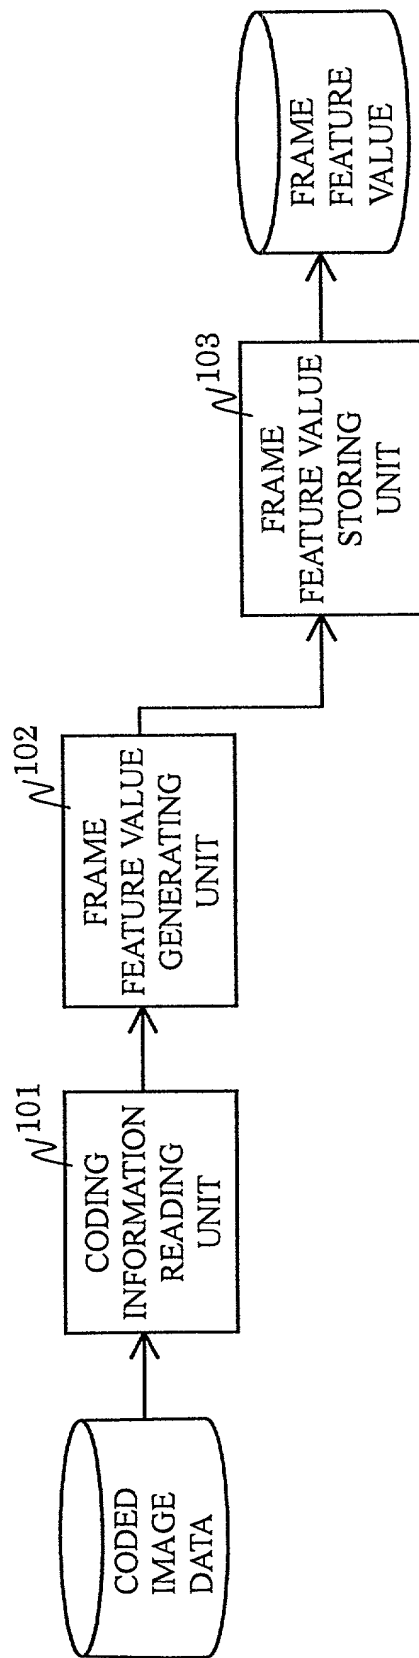


FIG. 2

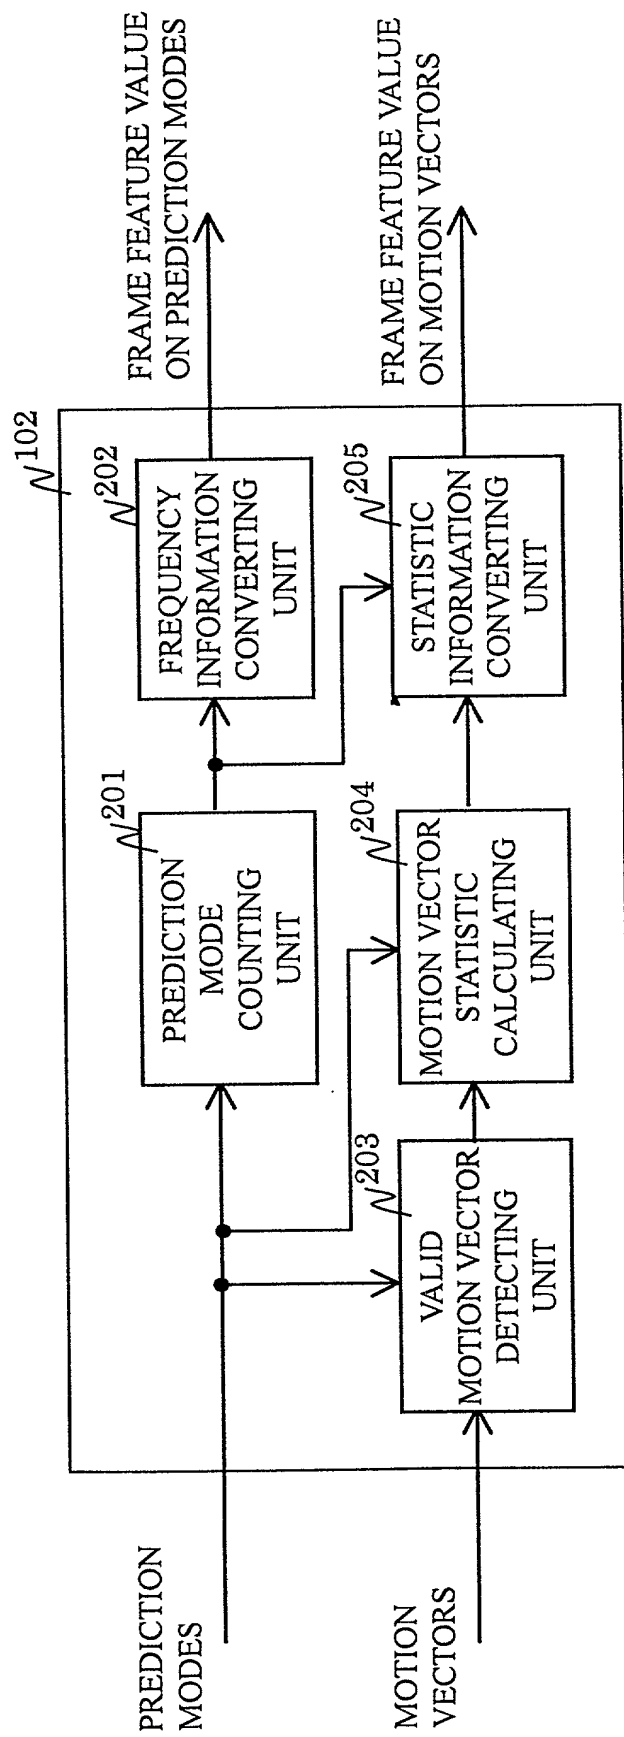


FIG. 3

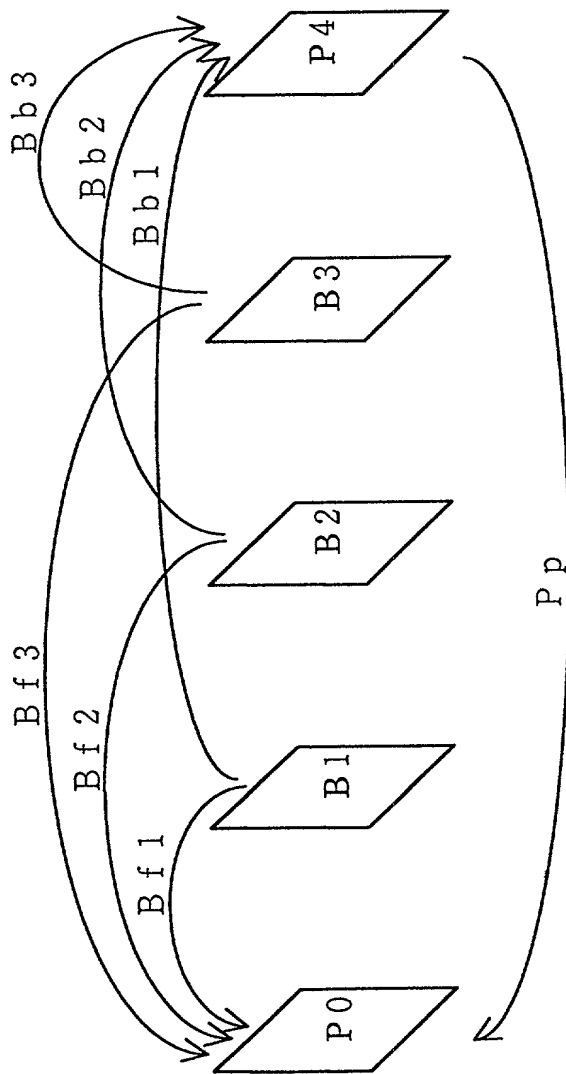


FIG. 4

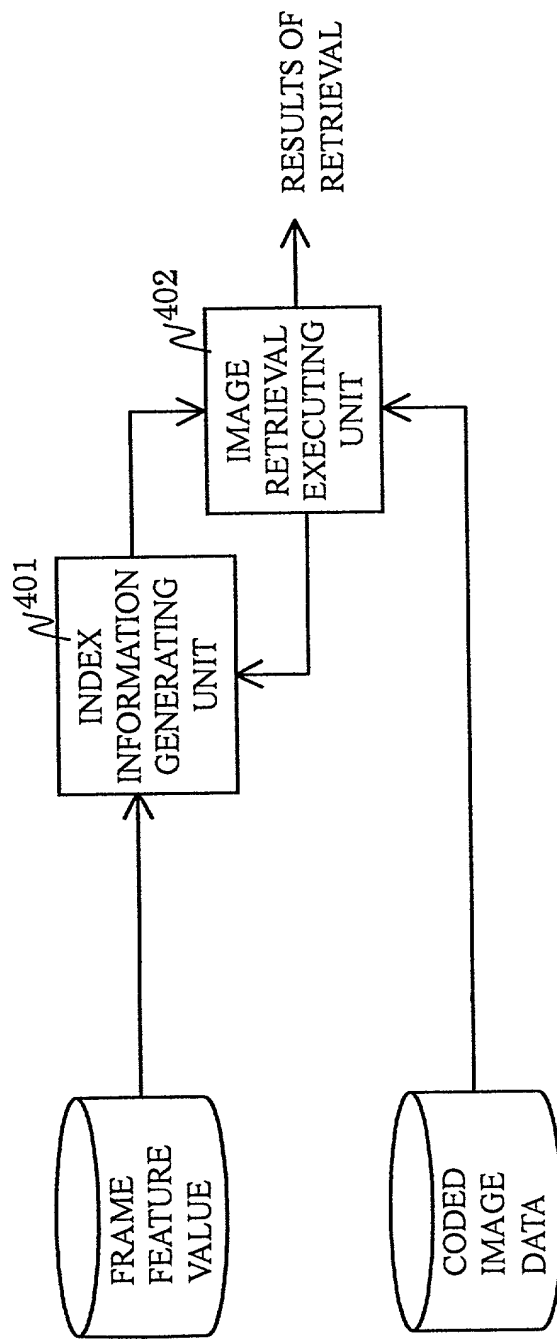


FIG. 5

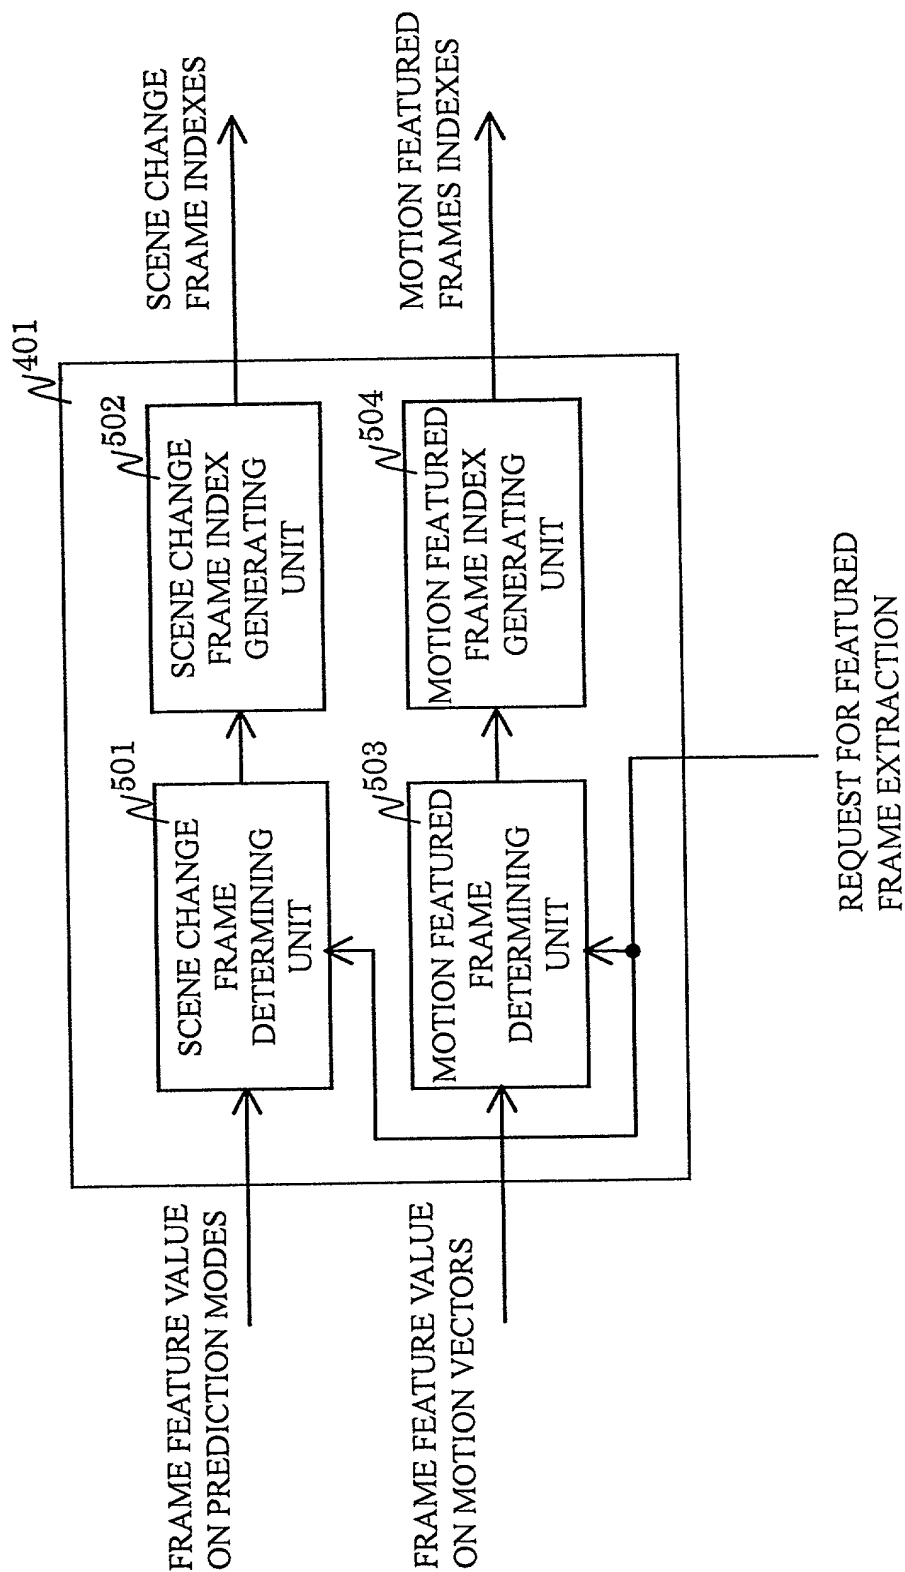


FIG. 6

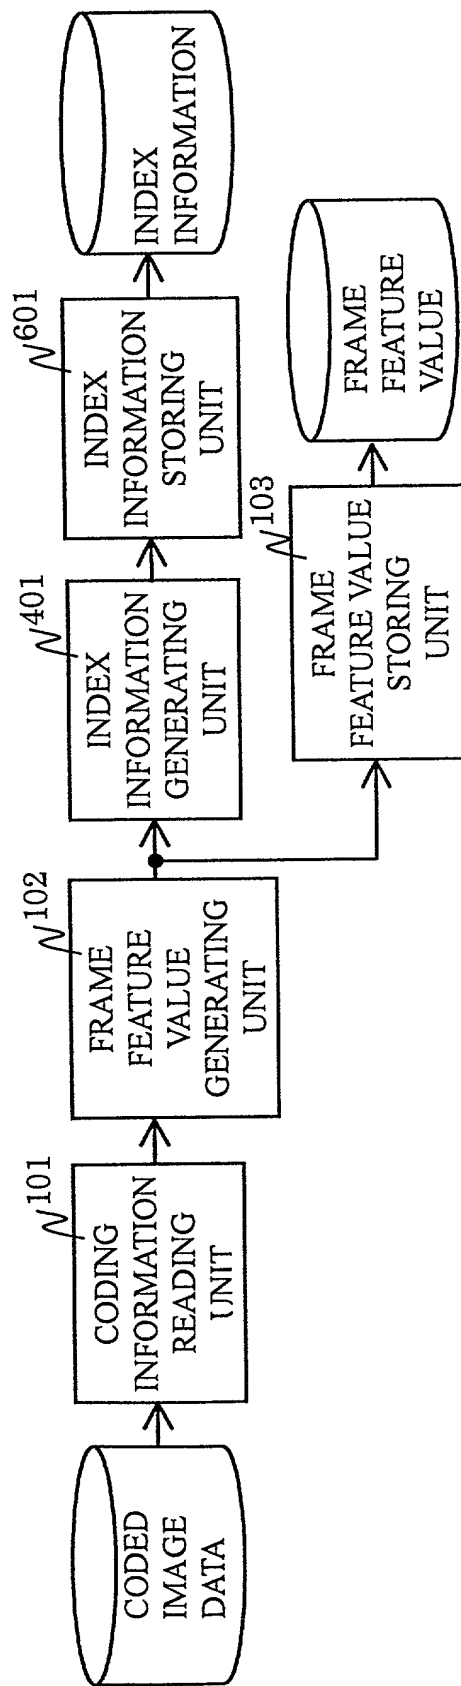


FIG. 7

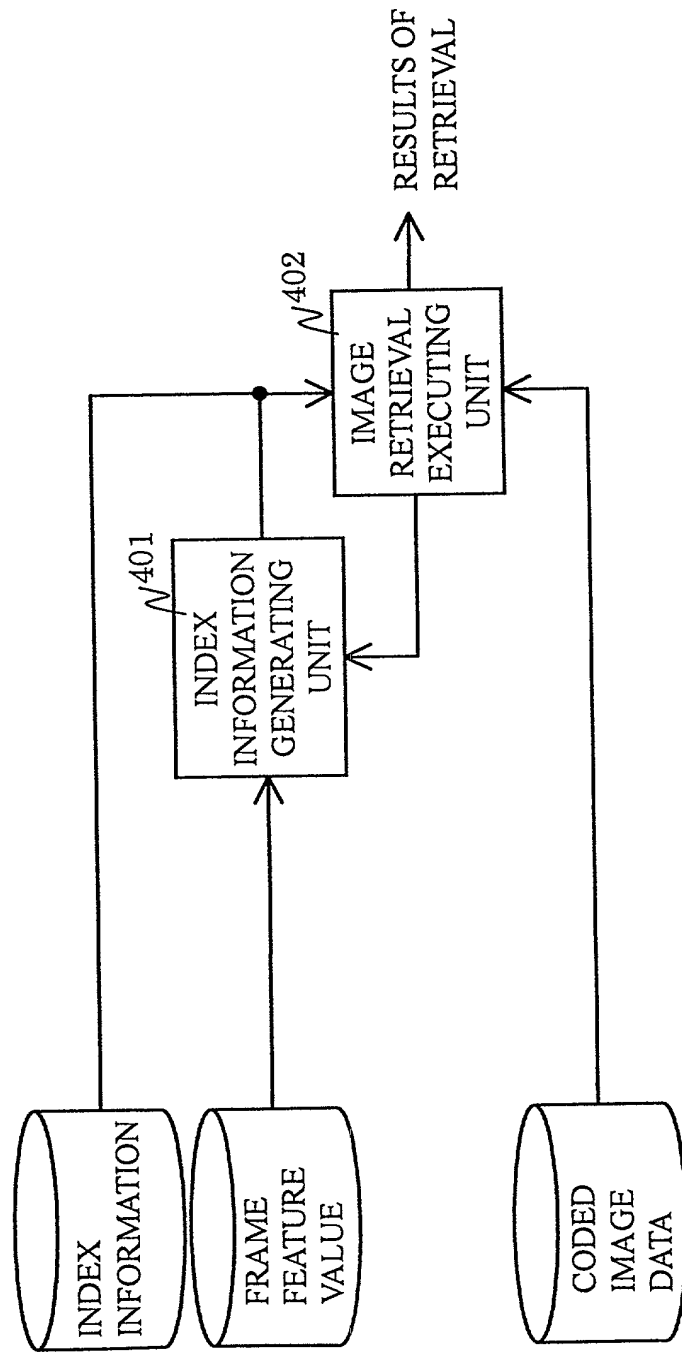


FIG. 8

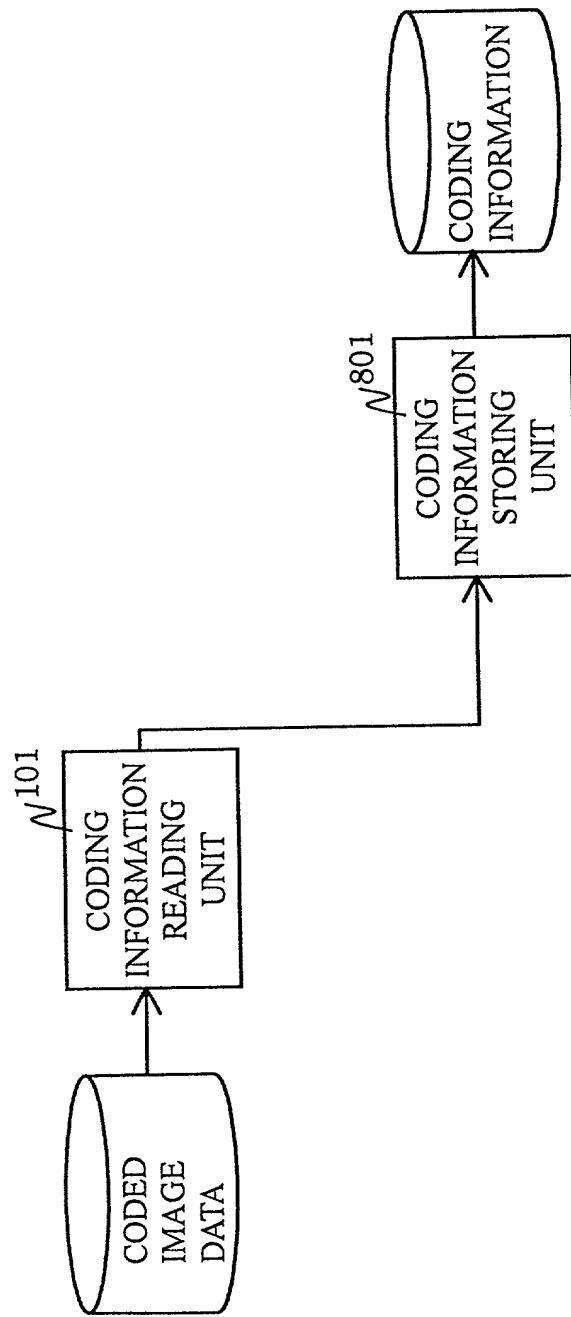


FIG. 9

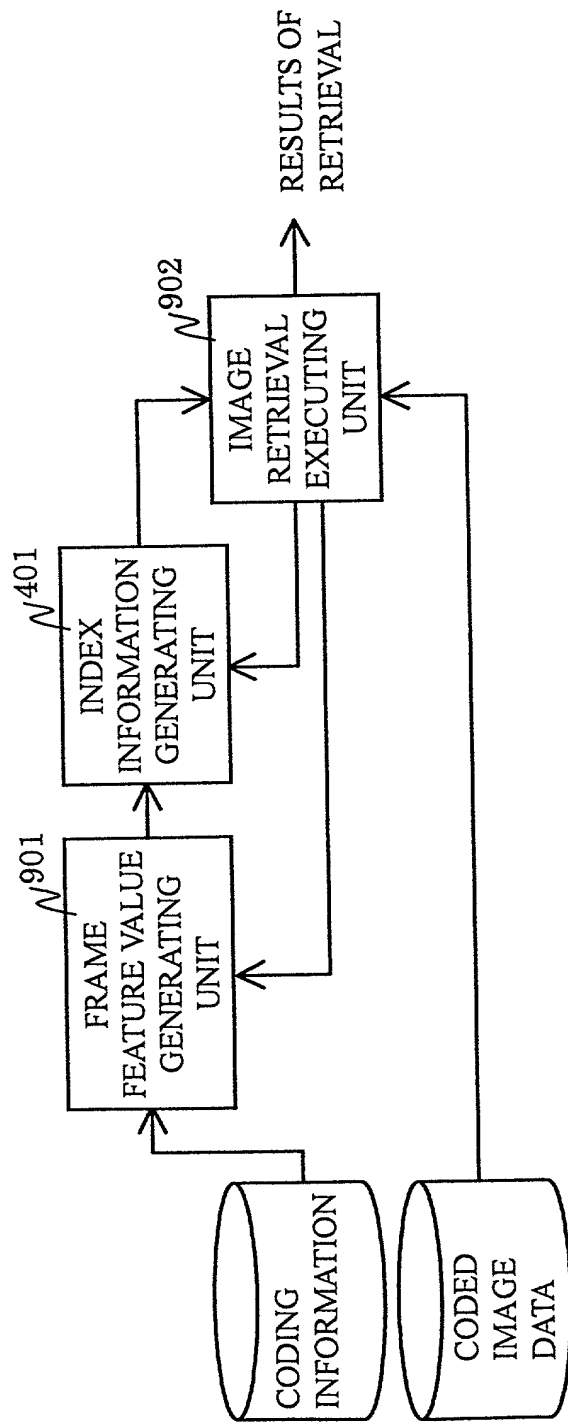


FIG. 10

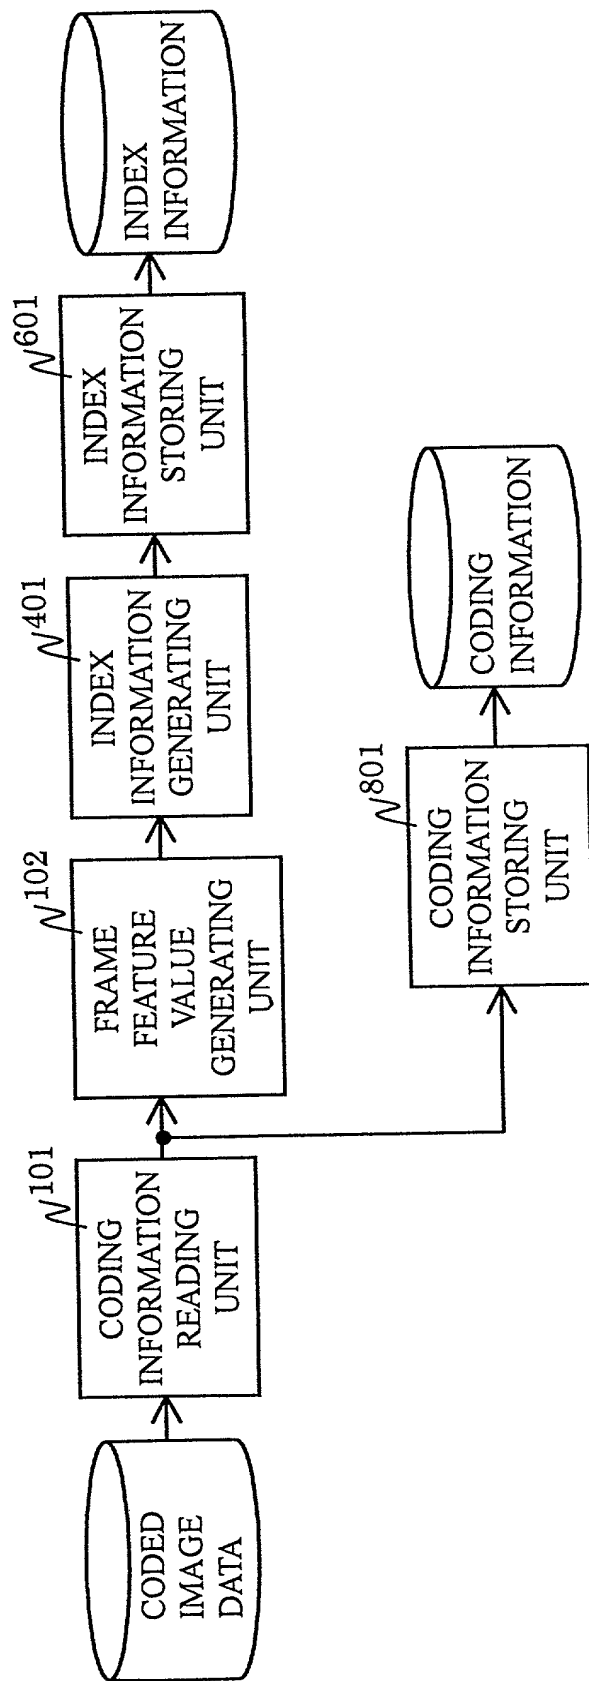


FIG. 11

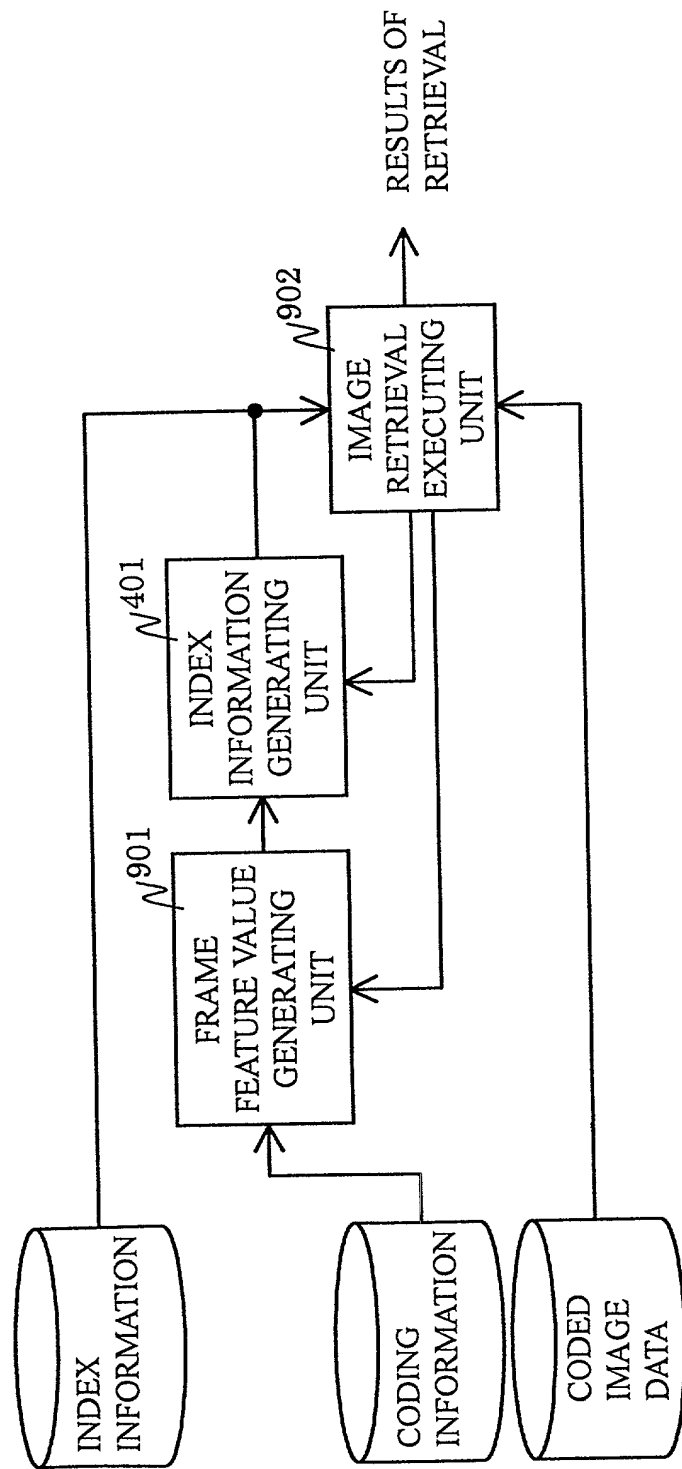


FIG. 12

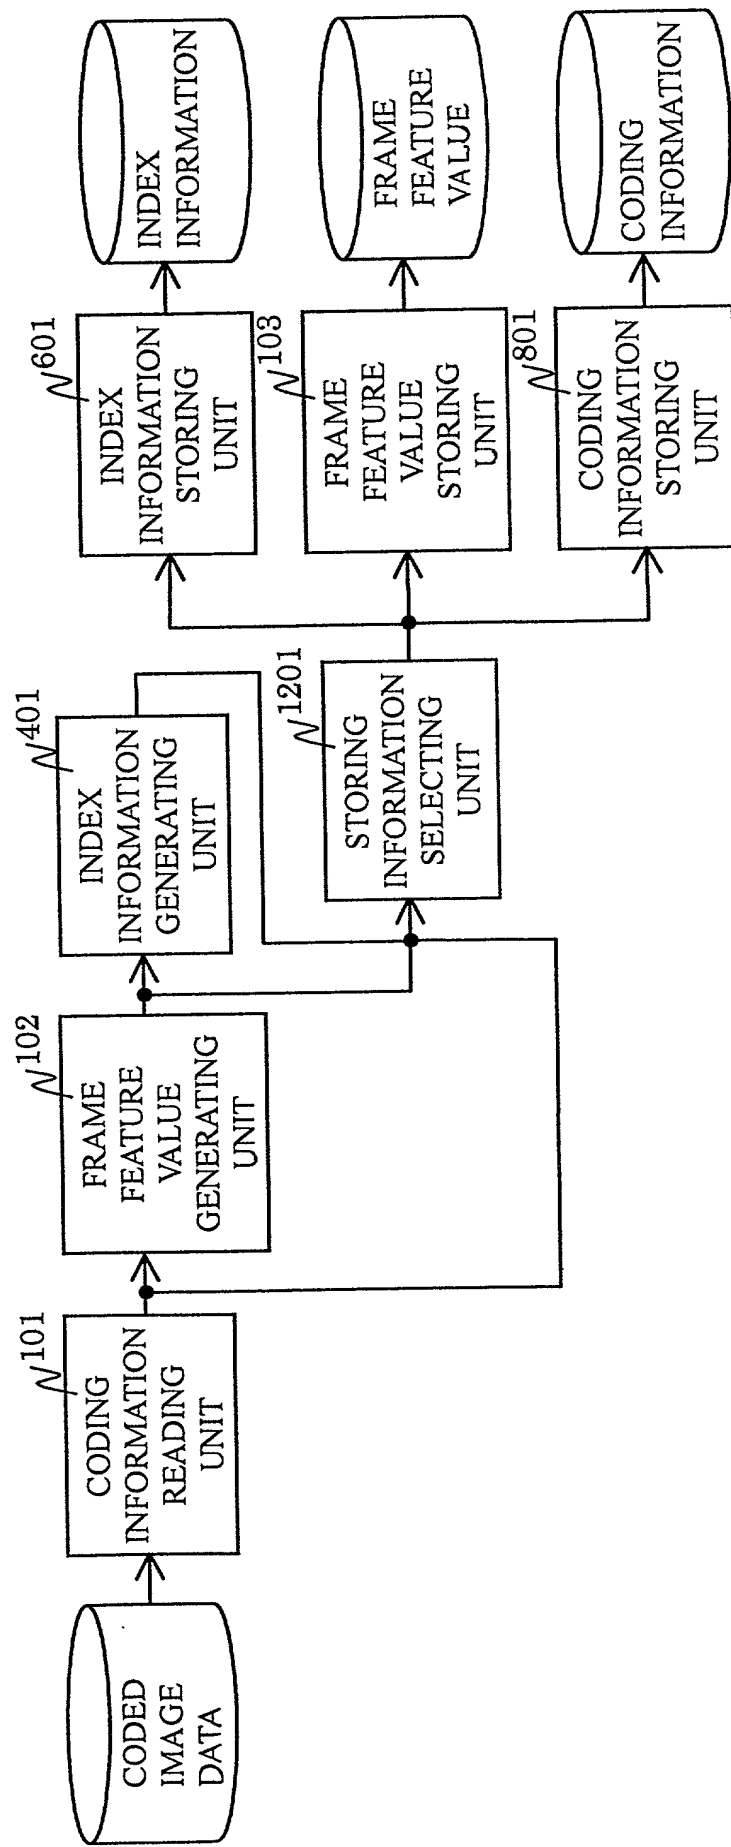


FIG. 13

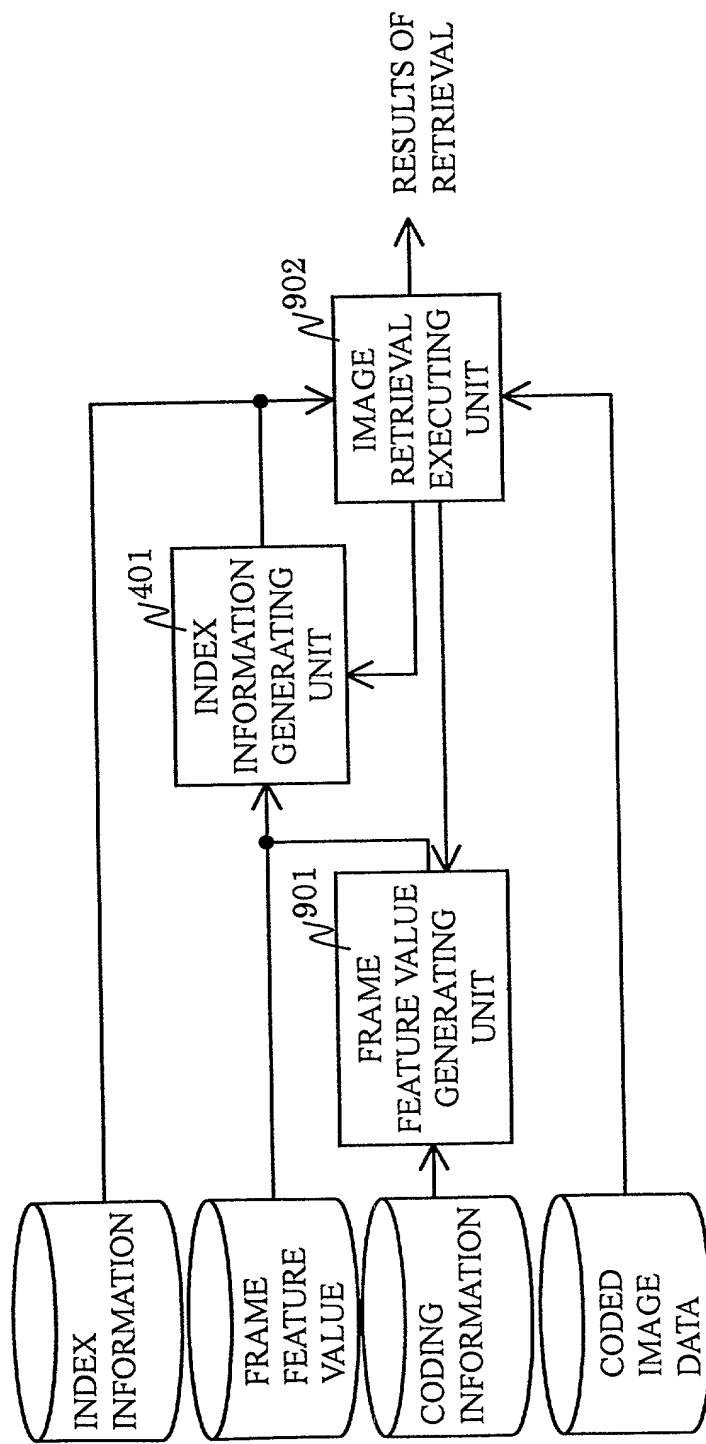


FIG. 14 PRIOR ART


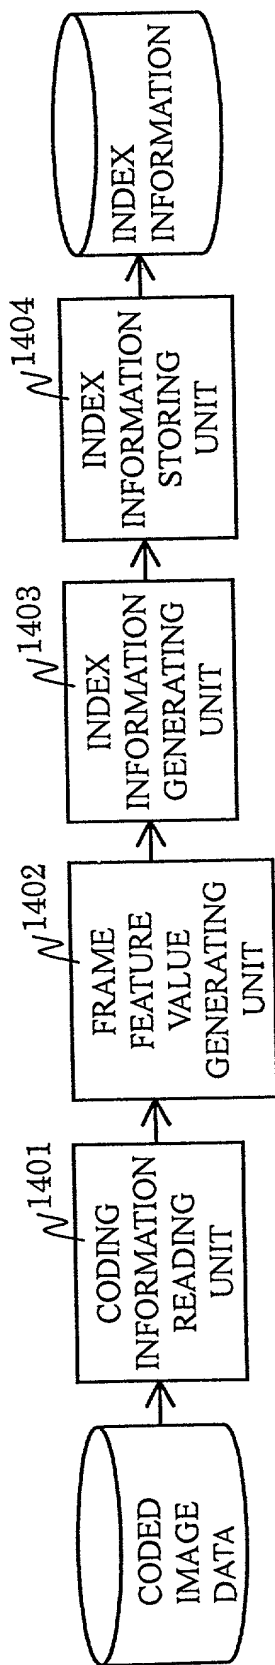


FIG. 15 PRIOR ART

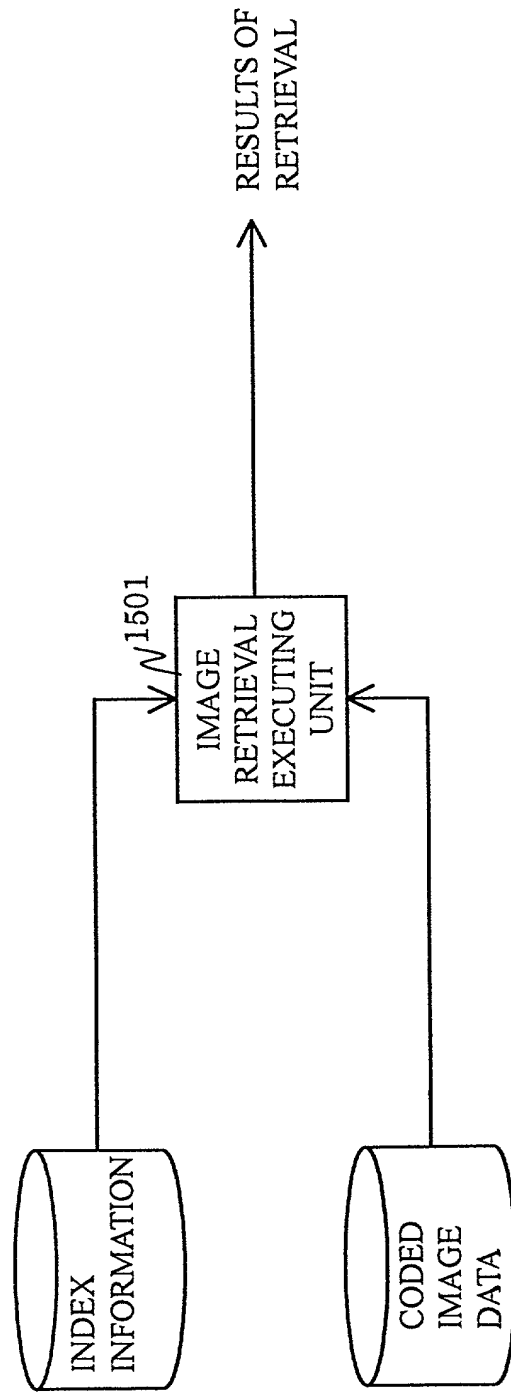

BIRCH, STEWART, KOLASCH & BIRCH, LLP

PLEASE NOTE:
YOU MUST
COMPLETE THE
FOLLOWING:

COMBINED DECLARATION AND POWER OF ATTORNEY

ATTORNEY DOCKET NO.

33-630P

FOR PATENT AND DESIGN APPLICATIONS

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Insert Title:

IMAGE RETRIEVING APPARATUS PERFORMING RETRIEVAL BASED ON
CODING INFORMATION UTILIZED FOR FEATURED FRAME EXTRACTION OR
FEATURE VALUES OF FRAMES

Fill in Appropriate
Information -
For Use Without
Specification
Attached:

the specification of which is attached hereto. If not attached hereto,

the specification was filed on _____ as
United States Application Number _____; and /or

the specification was filed on _____ as PCT
International Application Number _____; and was
amended under PCT Article 19 on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 (a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Insert Priority
Information:
(if appropriate)

➔ Prior Foreign Application(s)

(Number)	(Country)	(Month/Day/Year Filed)	Priority Claimed
10-338658 (P)	Japan	November 30, 1998	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No
_____	_____	_____	<input type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below.

Insert Provisional
Application(s):
(if any)

(Application Number)	(Filing Date)
_____	_____
_____	_____

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More Than 12 Months (6 Months for Designs) Prior To The Filing Date of This Application:

Insert Requested
Information:
(if appropriate)

Country	Application No.	Date of Filing (Month/Day/Year)
_____	_____	_____
_____	_____	_____

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Insert Prior U.S.
Application(s):
(if any)

(Application Number)	(Filing Date)	(Status - patented, pending, abandoned)
_____	_____	_____
_____	_____	_____

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, unless the inventor(s) or assignee provides said attorneys with a written notice to the contrary:

Terrell C. Birch	(Reg. No. 19,382)	Raymond C. Stewart	(Reg. No. 21,066)
Joseph A. Kolasch	(Reg. No. 22,463)	James M. Slattery	(Reg. No. 28,380)
Bernard L. Sweeney	(Reg. No. 24,448)	Michael K. Mutter	(Reg. No. 29,680)
Charles Gorenstein	(Reg. No. 29,271)	Gerald M. Murphy, Jr.	(Reg. No. 28,977)
Leonard R. Svensson	(Reg. No. 30,330)	Terry L. Clark	(Reg. No. 32,644)
Andrew D. Meikle	(Reg. No. 32,868)	Marc S. Weiner	(Reg. No. 32,181)
Joe McKinney Muncy	(Reg. No. 32,334)	Andrew F. Reish	(Reg. No. 33,443)
C. Joseph Faraci	(Reg. No. 32,350)	Donald J. Daley	(Reg. No. 34,313)

Send Correspondence to: **BIRCH, STEWART, KOLASCH & BIRCH, LLP**
P.O. Box 747 • Falls Church, Virginia 22040-0747
Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

PLEASE NOTE:
YOU MUST
COMPLETE THE
FOLLOWING:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or Sole
Inventor:
Insert Name of Inventor
Insert Date This
Document is Signed

Insert Residence
Insert Citizenship

Insert Post Office
Address

Full Name of Second
Inventor, if any:
see above

Full Name of Third
Inventor, if any
see above

Full Name of Fourth
Inventor, if any
see above

Full Name of Fifth
Inventor, if any
see above

GIVEN NAME		FAMILY NAME		INVENTOR'S SIGNATURE		DATE*	
Shuichi		WATANABE		Shuichi Watanabe		November 12, 1999	
Residence (City, State & Country)						CITIZENSHIP	
Chiba-shi, Chiba, Japan						Japanese	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)							
Raporu Honda #A125, 2-24-7, Honda-cho, Midori-ku, Chiba-shi, Chiba, Japan							
GIVEN NAME		FAMILY NAME		INVENTOR'S SIGNATURE		DATE*	
Residence (City, State & Country)						CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)							
GIVEN NAME		FAMILY NAME		INVENTOR'S SIGNATURE		DATE*	
Residence (City, State & Country)						CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)							
GIVEN NAME		FAMILY NAME		INVENTOR'S SIGNATURE		DATE*	
Residence (City, State & Country)						CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)							
GIVEN NAME		FAMILY NAME		INVENTOR'S SIGNATURE		DATE*	
Residence (City, State & Country)						CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)							

* DATE OF SIGNATURE